


**OutdoorSmart
 Filter Alarm**

All Polylok/Zabel
 filters accept the
 SmartFilter®
 switch and alarm.

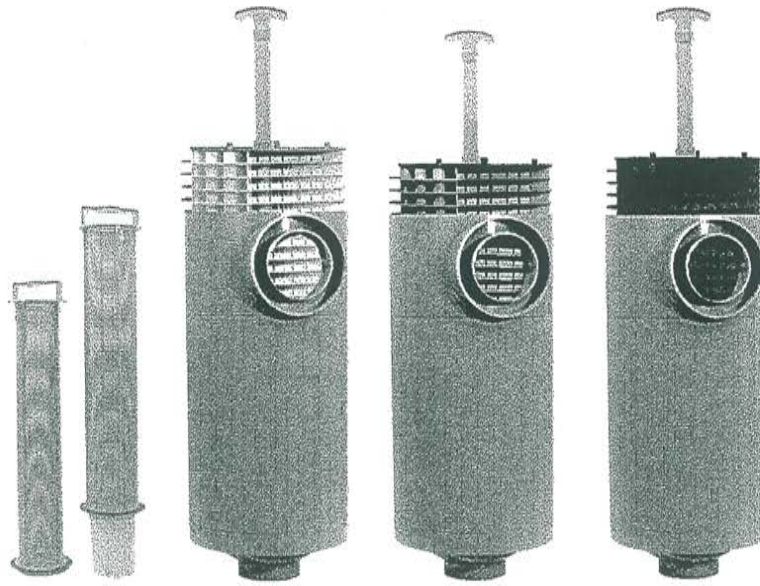


A1800 Series

A100 Series

A300 Series

A600 Series

Features	A1800 Series	A100 Series	A300 Series	A600 Series
Filtration	1/16"	1/16"	1/32"	1/64"
Gallons Per Day	800	1200 - 6000	1200 - 6000	1200 - 6000
Linear Feet of Filtration	80	78 - 338	78 - 338	78 - 338
SmartFilter Switch and Alarm	Available	Available	Available	Standard
Available Filter Dimensions	4x18, 4x22	8x18, 8x26, 8x32 12x20, 12x28, 12x36	8x18, 8x26, 8x32 12x20, 12x28, 12x36	8x18, 8x26, 8x32 12x20, 12x28, 12x36
Disc Dam Technology		X	X	X
Extend & Lok Compatible	X	X	X	X
NSF Certification	X	X	X	
Installed in Multiples for Larger Flows		X	X	X
Applications				
Residential	X	X	X	
Residential Multi-Family	X	X	X	
Commercial		X	X	X
Grease Traps			X	X
High TSS Removal	X	X	X	X
Benefits				
Extends Life of Leaching Fields	X	X	X	X
Keeps Solids in Septic Tank	X	X	X	X
Polylok Comparable Filter	PL-68	PL-122	PL-525 or PL-625	PL-525 or PL-625

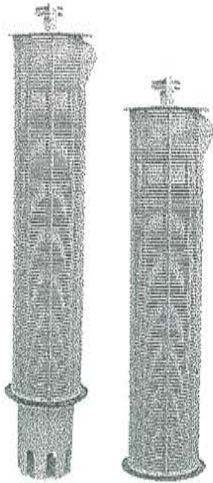


A1800

Like the PL-68, this filter was designed for Residential applications. The cartridge design allows for easy installation and maintenance and comes with our standard baffle (tee). All A1800 Series filters feature a locking tab that securely locks the filter into the tee. With 1/16" filtration, this filter is available in 18" and 22" lengths. The 22" A1800 comes with a built in gas deflector.

Patented Inside Out flow

Zabel's patented flow reduces the trapping of solids in the filter by allowing them to slough off and fall back into the tank for further digestion.

Slots rather than mesh screens provide less surface area for solids to attach and promote the sloughing action. Independent research has shown the Zabel A1800™ Series Filters reduce TSS by 40% in residential applications.

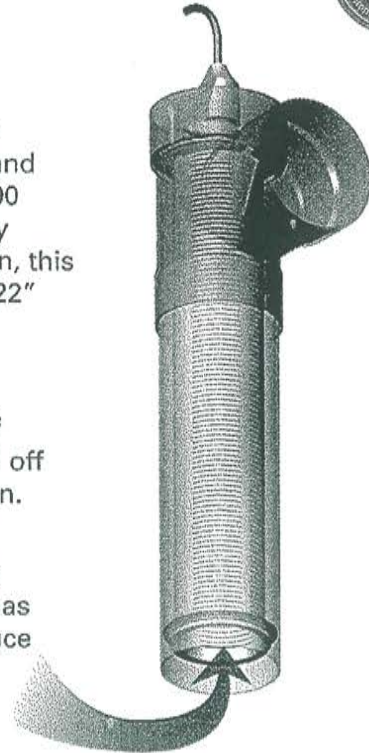


Outdoor Smart Filter Alarm

All Polylok/Zabel filters accept the SmartFilter® switch and alarm.



Our 4x18 and 4x22 filters can be used with ANY tee, including our PL-68 tee and our Versa-tees.

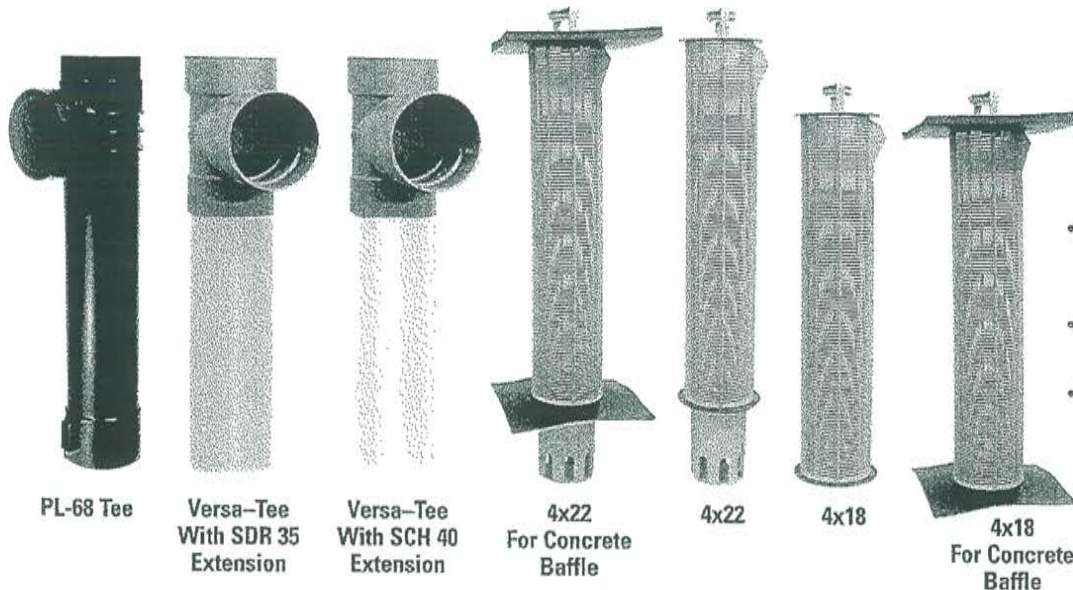

New One Piece Design

- Filters are no longer snapped together
- Won't break when servicing
- Now made of PolyPro for extra strength



**OutdoorSmart
 Filter Alarm**

All Polylok/Zabel
 filters accept the
 SmartFilter®
 switch and alarm.



**A100 Filter 1/16" Filtration
 8" and 12" Diameter**

This filter is ideal for larger homes, multi-family homes or light commercial settings where increased flows or higher quality effluent is required. The A100-8 Series is sized to handle flow rates from 1200 to 2400 GPD and is available in three different lengths. The A100-12 Series, installed in more locations than any other filter on the market, is sized to handle flow rates from 3000 to 6000 GPD. The A100-12 Series can be used in almost any application. Independent research has shown the A100-12 decreases TSS by 50-90% and CBOD₅ by 20-40%. With 1/16" filtration, the A100-8 Series filter is available in 18", 26" and 32" lengths. The A100-12 Series filter is available in 20", 28" and 36" lengths.

**A300 Filter 1/32" Filtration
 8" and 12" Diameter**

The finer 1/32" level of filtration achieved with the A300-8 filter makes this the perfect effluent filter for small grease trap applications, dog kennels, laundromats and other applications where fine suspended solids are present. The A300 offers flow rates between 1200-2400 GPD. The A300-12 Series provides 1/32" filtration and has been shown to reduce FOG by as much as 50-98%. The A300-12 is also used for onsite wastewater systems which require a finer level of TSS removal. The A300-8 Series filter is available in 12", 26" and 32" lengths. The A300-12 Series filter is available in 20", 28" and 36" lengths.


**A600 Filter 1/64" Filtration
 8" and 12" Diameter**

The A600 is ideal for specialty applications where very fine filtration is required and low flows are expected. Due to fine, 1/64" level filtration, every A600 comes equipped with a SmartFilter® switch and alarm. The SmartFilter® switch provides notification of required filter servicing through the use of both an audible and visual alarm. A minimum of a 3" drop is required in the tank for proper SmartFilter® operation. The A600-8 Series filter is available in 18", 26" and 32" lengths. The A600-12 Series is available in 20", 28" and 36" lengths.





The Best Filter is a great addition to the Polylok filter family. The GF10 Filter is 10" x 18" and is available in three filtration designs: 1/8", 1/16" and 1/32". The exterior of the GF10 filter is a single-piece case. It has no joints and no glue holding it together which gives it incredible strength. It is made of impact-resistant PVC so it can withstand harsh treatment and it won't break!

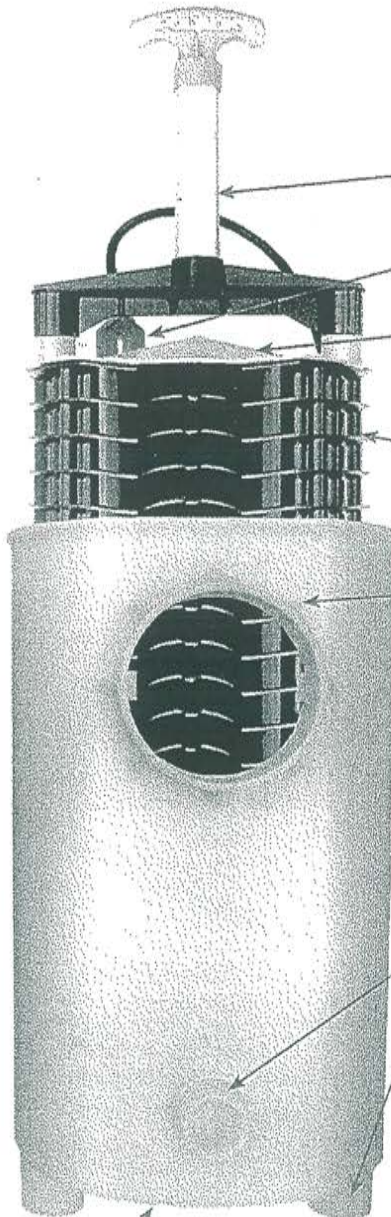

Accepts 1" PVC Handle Extension

Alarm Switch

The D-Shaped Inlet makes replacing the cartridge easy.

The cartridge locks into the case, so the filter will never float up and cause the system to back up.

The outlet has eight gussets which insures maximum strength and stability under any load.

The open bottom inlet decreases turbulence and allows material to fall back down into the tank


The case has two optional molded-in hubs on the bottom for additional support and one molded-in hub on the side for stability.



**OutdoorSmart
 Filter Alarm**

All Polylok/Zabel filters accept the SmartFilter® switch and alarm.

Technical Specifications
 See Page 36

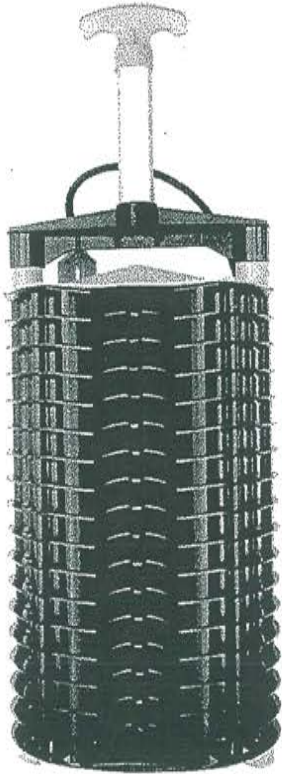


A Great Design

The Best GF10 filter doesn't just trap solids, its unique conical shape design allows unwanted material to flow over the plates and fall back into the tank. The filter has a one-piece housing made of impact resistant PVC.

The GF10 filter plates are locked together with five ribs and two sections of 3/4" Schedule 40 PVC pipe. This unique configuration provides even weight distribution and maximum strength.

The GF10 is rated at 2500 GPD and is available in 1/8", 1/16" and 1/32" filtration levels. The smaller filtration levels are ideal for residential settings and the 1/32" filtration can be used in most commercial applications including wastewater treatment systems, grease traps, dog kennels or salons.

The GF10 is known for its strength. The housing, as well as the outlet were designed with durability in mind. To show just how strong the filter is, we placed a 420 pound concrete riser on top of the GF10 filter case and connected it to a 4" Sch 40 pipe.

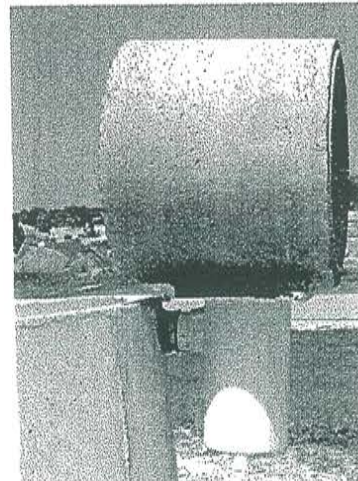

To further improve the strength of this filter, our engineers redesigned the handle, making it even sturdier than the original design.



OutdoorSmart Filter Alarm

All filters accept the SmartFilter® switch and alarm.

